Seamless Indirect 0.54 FL-IN54

A plaster-in indirect profile that throws soft light onto the ceiling from a hidden slot.

PRODUCT INFORMATION

Model	FL-IN54
Category	Wall Wash / Indirect
Aperture (inner width)	0.54" (13.7 mm)
Overall width	3.8" (96.5 mm)
Length	96" (8 ft) per piece
Max tape width	13 mm
Max tape power	15 W/m (4.6 W/ft)
Material	Extruded aluminum
Finish	Powder-coated white
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- Indirect optic
- 3.80" mud-in flange
- White finish
- Up to 13 mm tape
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-IN54-WH-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-IN54	–	WH Powder-coated white	–	OP Opal polycarbonate	–	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

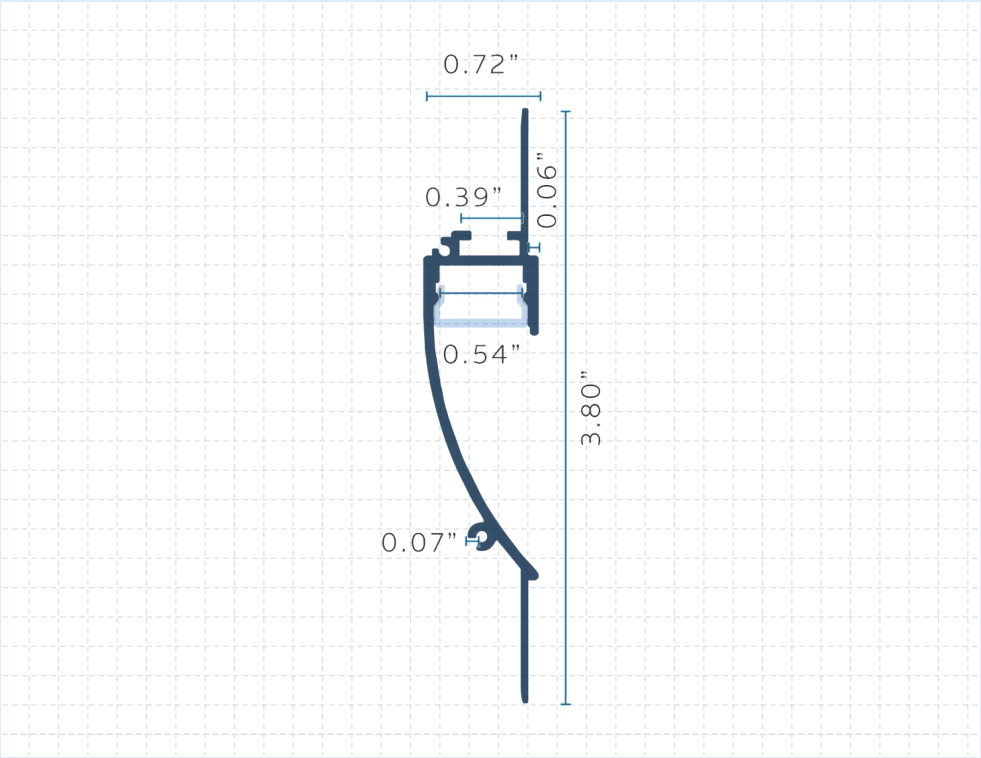

KEY DIMENSIONS

Aperture	0.54" (13.7 mm)
Overall width	3.8" (96.5 mm)
Length	96" (2438 mm)
Max tape width	13 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES

FL-IN54-EC
End cap
Included with kit; spare

FL-IN54-DF
Opal diffuser, 96" (spare)
Included with kit; spare