
# Recessed Micro 0.33 FL-RC33

A tiny recessed channel for 8 mm tape in shelves, handrails and millwork grooves.

## PRODUCT INFORMATION

| | |
|---|---|
| **Model** | FL-RC33 |
| **Category** | Surface Mount |
| **Aperture (inner width)** | 0.33" (8.4 mm) |
| **Overall width** | 0.92" (23.4 mm) |
| **Length** | 96" (8 ft) per piece |
| **Max tape width** | 8 mm |
| **Max tape power** | 15 W/m (4.6 W/ft) |
| **Material** | Extruded aluminum |
| **Finish** | Anodized silver |
| **Diffuser** | Opal (frosted) polycarbonate |
| **End caps** | PVC |
| **Field cuttable** | Yes |
| **Location** | Dry location |

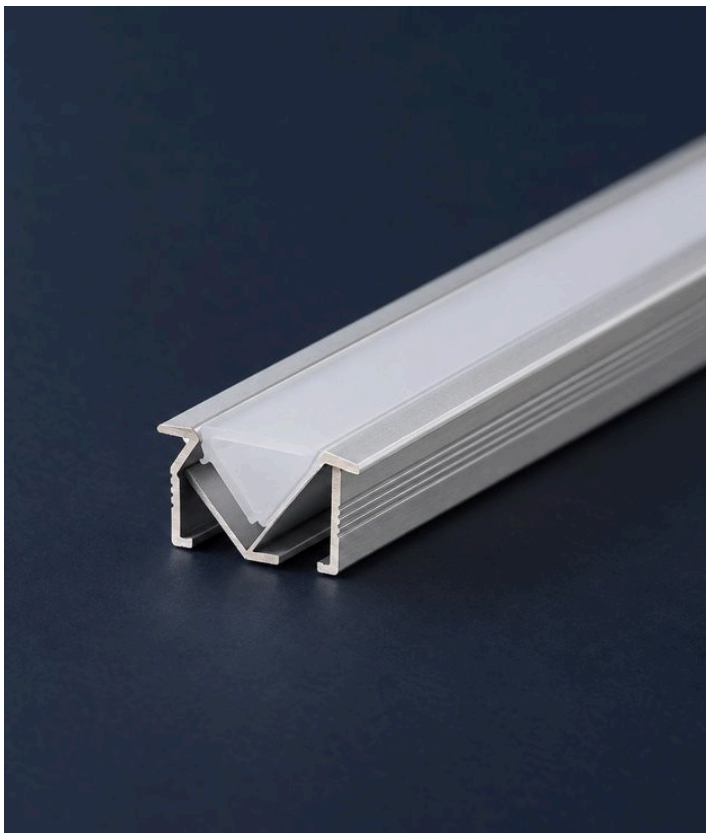

## FEATURES

- 0.33" aperture, 0.92" flange
- 8 mm tape
- Up to 4.6 W/ft
- 8 ft kit
- Field-cuttable aluminum body and diffuser in 96" lengths

## ORDERING GUIDE


MODEL NUMBER **FL-RC33-SV-OP-8**

| MODEL | | FINISH | | DIFFUSER | | LENGTH |
|---|---|---|---|---|---|---|
| FL-RC33 | _ | SV<br>Anodized silver | _ | OP<br>Opal polycarbonate | _ | 8<br>96" (8 ft) |

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps, clips

Flowlite reserves the rights to change specifications without notice

## DIMENSIONS

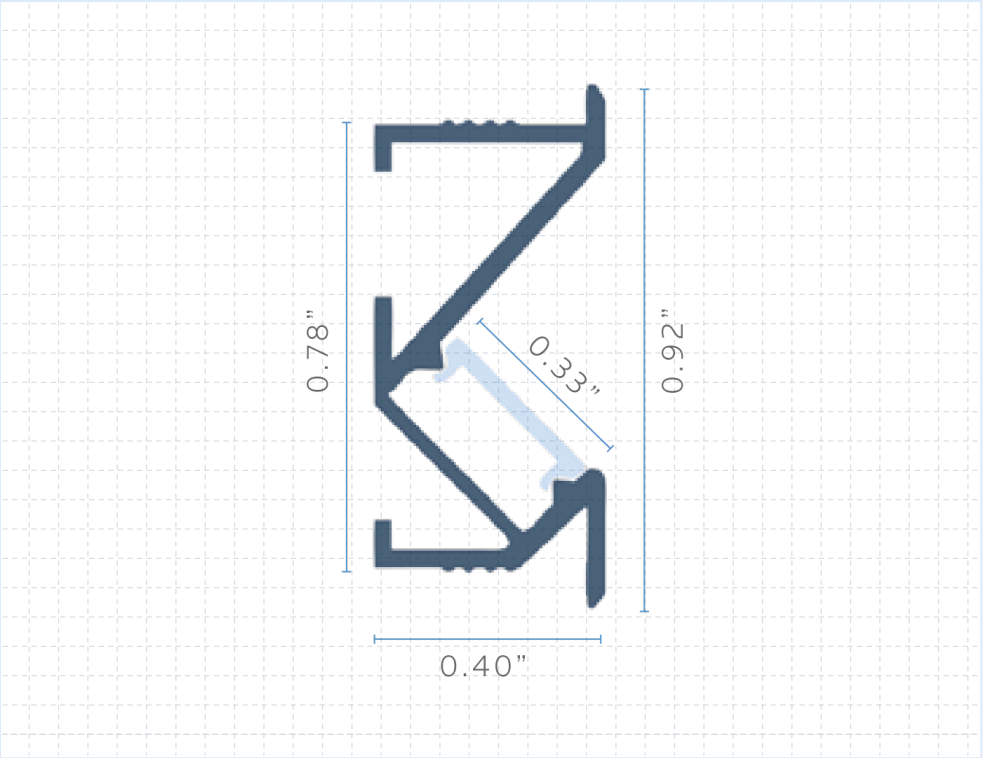


### KEY DIMENSIONS

| | |
|---|---|
| **Aperture** | 0.33" (8.4 mm) |
| **Overall width** | 0.92" (23.4 mm) |
| **Length** | 96" (2438 mm) |
| **Max tape width** | 8 mm |

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

## ACCESSORIES

**FL-RC33-CL**
Mounting clip
Included with kit; spare

**FL-RC33-EC**
End cap
Included with kit; spare

**FL-RC33-DF**
Opal diffuser, 96" (spare)
Included with kit; spare