FlowLite

Specification Sheet
Recessed 0.48 Channel

Recessed 0.48 FL-RC48A

A flanged recessed channel for routed millwork and drywall cut-outs.

PRODUCT INFORMATION

Model	FL-RC48A
Category	Surface Mount
Aperture (inner width)	0.48" (12.2 mm)
Overall width	0.9" (22.9 mm)
Length	96" (8 ft) per piece
Max tape width	10 mm
Max tape power	15 W/m (4.6 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- 0.48" aperture, 0.90" flange
- Up to 10 mm tape
- 8 ft kit
- Opal diffuser
- Field-cuttable aluminum body and diffuser in 96" lengths


ORDERING GUIDE

MODEL NUMBER **FL-RC48A-SV-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-RC48A	–	SV Anodized silver	–	OP Opal polycarbonate	–	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps, clips

DIMENSIONS

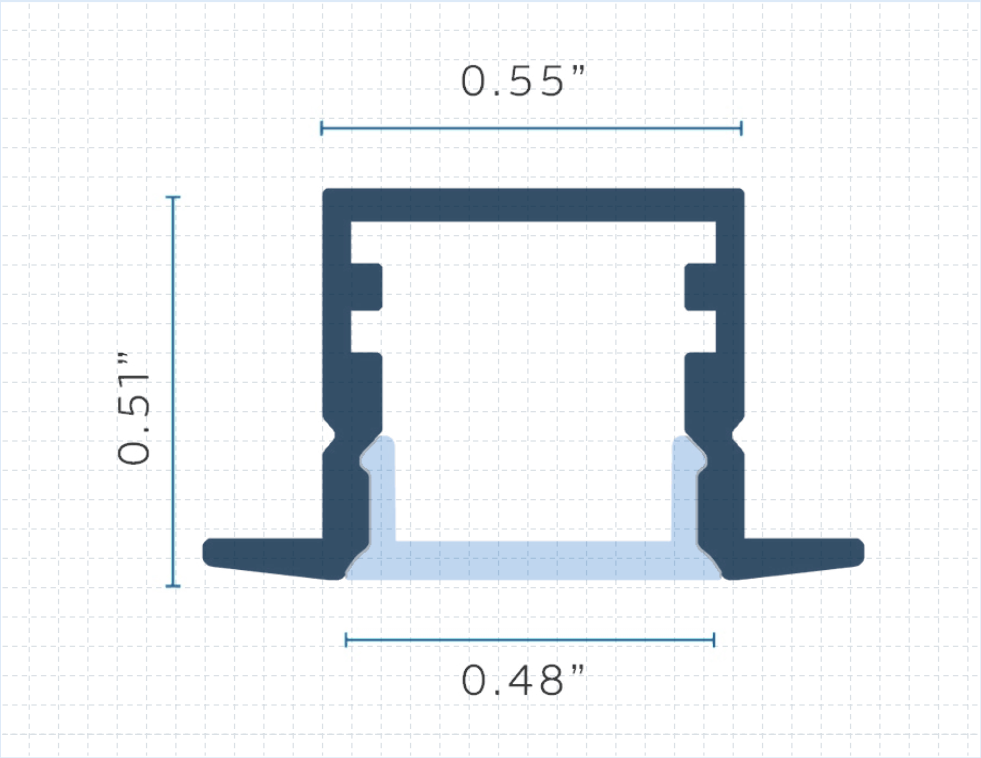

KEY DIMENSIONS

Aperture	0.48" (12.2 mm)
Overall width	0.9" (22.9 mm)
Length	96" (2438 mm)
Max tape width	10 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES

FL-RC48A-CL
Mounting clip
Included with kit; spare

FL-RC48A-EC
End cap
Included with kit; spare

FL-RC48A-DF
Opal diffuser, 96" (spare)
Included with kit; spare