# Surface Micro 0.40 FL-SM40

The smallest surface channel, for low-profile casework and display details.

## PRODUCT INFORMATION

| | |
|---|---|
| **Model** | FL-SM40 |
| **Category** | Surface Mount |
| **Aperture (inner width)** | 0.4" (10.2 mm) |
| **Overall width** | 0.54" (13.7 mm) |
| **Length** | 96" (8 ft) per piece |
| **Max tape width** | 10 mm |
| **Max tape power** | 12 W/m (3.7 W/ft) |
| **Material** | Extruded aluminum |
| **Finish** | Anodized silver |
| **Diffuser** | Opal (frosted) polycarbonate |
| **End caps** | PVC |
| **Field cuttable** | Yes |
| **Location** | Dry location |



## FEATURES

- 0.54" overall width
- Up to 10 mm tape
- Low-power tape up to 3.7 W/ft
- 8 ft kit
- Field-cuttable aluminum body and diffuser in 96" lengths

## ORDERING GUIDE


MODEL NUMBER **FL-SM40-SV-OP-8**

| MODEL | | FINISH | | DIFFUSER | | LENGTH |
|---|---|---|---|---|---|---|
| FL-SM40 | – | SV<br>Anodized silver | – | OP<br>Opal polycarbonate | – | 8<br>96" (8 ft) |

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps, clips

Flowlite reserves the rights to change specifications without notice

## DIMENSIONS

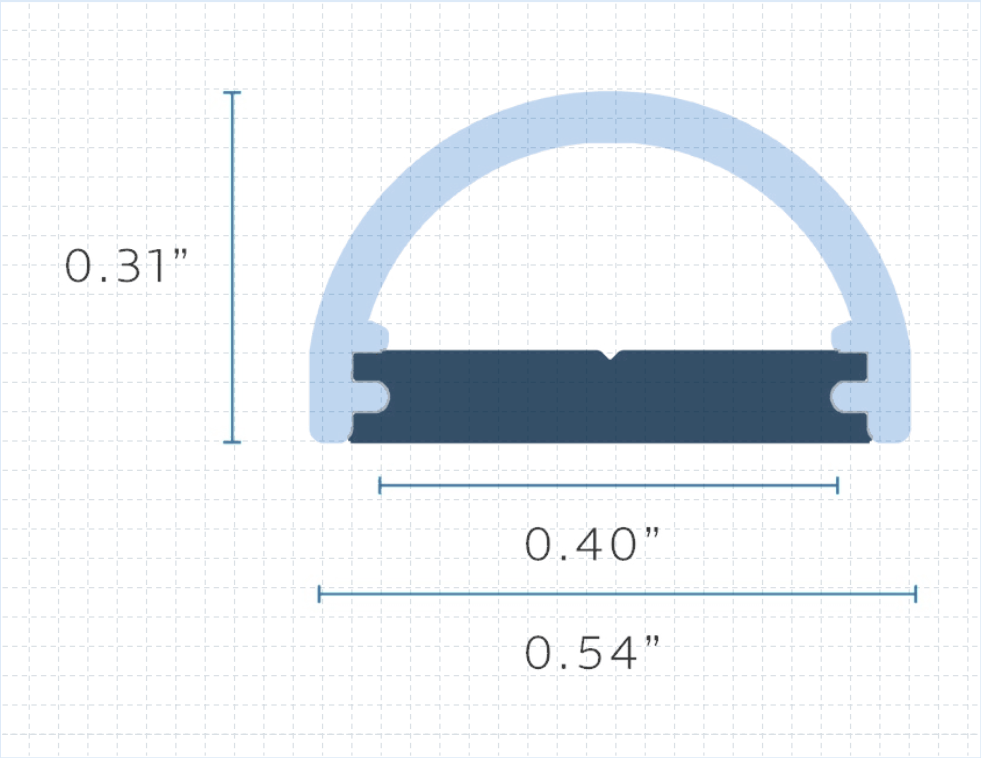


### KEY DIMENSIONS

| | |
|---|---|
| **Aperture** | 0.4" (10.2 mm) |
| **Overall width** | 0.54" (13.7 mm) |
| **Length** | 96" (2438 mm) |
| **Max tape width** | 10 mm |

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

## ACCESSORIES

**FL-SM40-EC**
End cap
Included with kit; spare

**FL-SM40-DF**
Opal diffuser, 96" (spare)
Included with kit; spare