
Surface 0.48 A FL-SM48A

Our standard surface channel, in three finishes with 90° and 180° connectors.

PRODUCT INFORMATION

Model	FL-SM48A
Category	Surface Mount
Aperture (inner width)	0.48" (12.2 mm)
Overall width	0.66" (16.8 mm)
Length	96" (8 ft) per piece
Max tape width	12 mm
Max tape power	20 W/m (6.1 W/ft)
Material	Extruded aluminum
Finish	Anodized silver, Black, White
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location

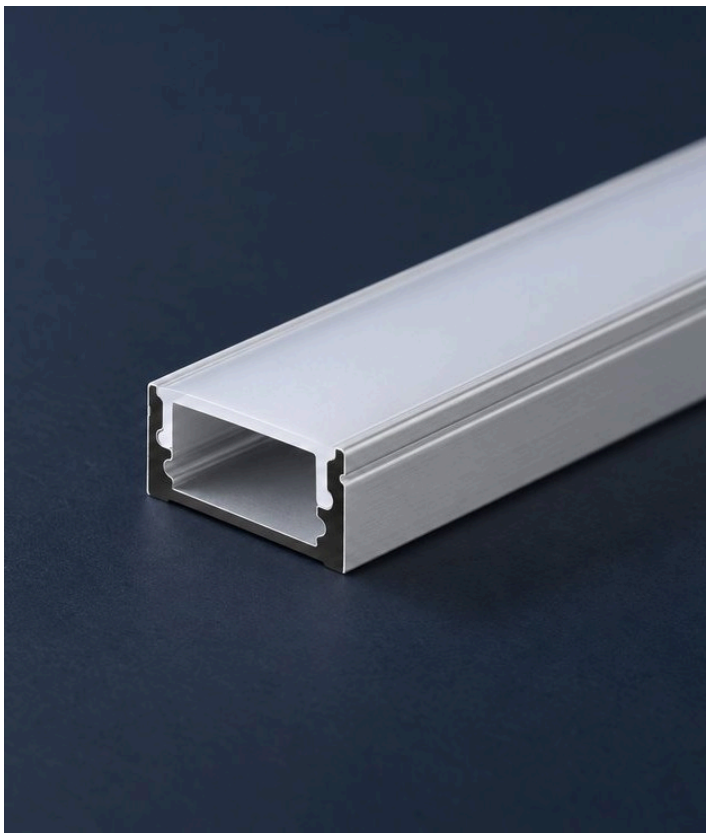

FEATURES

- 0.48" aperture, 0.66" wide
- Silver, black or white
- 90° and 180° connectors
- Up to 12 mm tape, 6.1 W/ft
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-SM48A-SV-OP-8** (example; choose one option per box below)

MODEL	FINISH	DIFFUSER	LENGTH
FL-SM48A	SV = Anodized silver BK = Black WH = White	OP Opal polycarbonate	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps, clips

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

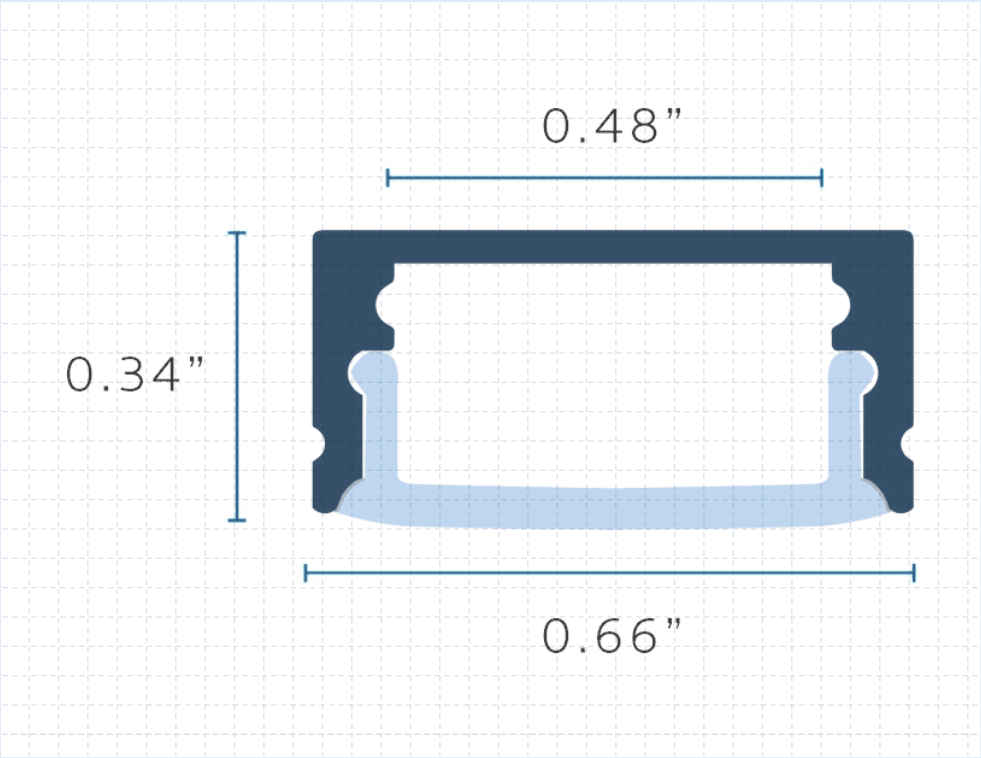

KEY DIMENSIONS

Aperture	0.48" (12.2 mm)
Overall width	0.66" (16.8 mm)
Length	96" (2438 mm)
Max tape width	12 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES



FL-SM48A-C90
90° connector



FL-SM48A-C180
180° connector

FL-SM48A-CL
Mounting clip

FL-SM48A-EC
End cap

FL-SM48A-DF
Opal diffuser, 96" (spare)