Surface Magnetic 0.48 FL-SM48M

A surface channel with magnetic mounting for removable installs in retail fixtures and steel casework.

PRODUCT INFORMATION

Model	FL-SM48M
Category	Surface Mount
Aperture (inner width)	0.48" (12.2 mm)
Overall width	0.66" (16.8 mm)
Length	96" (8 ft) per piece
Max tape width	12 mm
Max tape power	15 W/m (4.6 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- Surface or magnetic mount
- 0.66" overall width
- Up to 12 mm tape
- 8 ft kit
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-SM48M-SV-OP-8**

MODEL	FINISH	DIFFUSER	LENGTH
FL-SM48M	SV Anodized silver	OP Opal polycarbonate	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps, clips

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

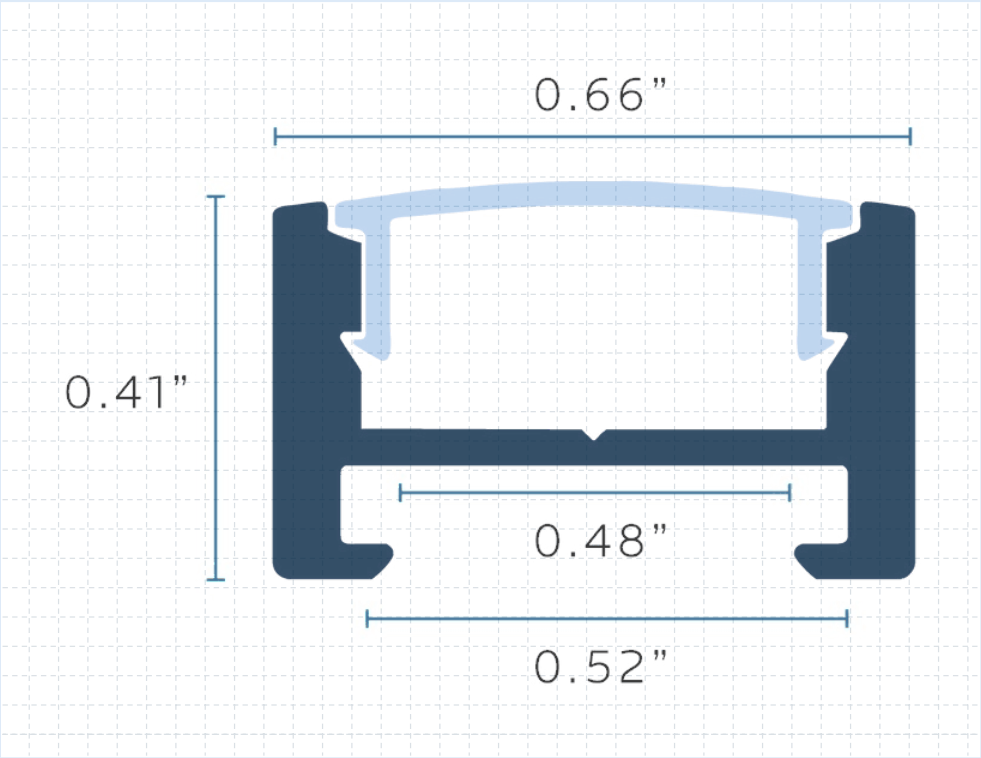

KEY DIMENSIONS

Aperture	0.48" (12.2 mm)
Overall width	0.66" (16.8 mm)
Length	96" (2438 mm)
Max tape width	12 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES

FL-SM48M-MP
Magnetic plate
Included with kit; spare

FL-SM48M-EC
End cap
Included with kit; spare

FL-SM48M-DF
Opal diffuser, 96" (spare)
Included with kit; spare