Plaster-In 1.85 FL-TL185

Our widest plaster-in profile, for statement lines of light in lobbies and large open ceilings.

PRODUCT INFORMATION

Model	FL-TL185
Category	Trimless / Plaster-In
Aperture (inner width)	1.85" (47.0 mm)
Overall width	3.85" (97.8 mm)
Length	96" (8 ft) per piece
Max tape width	47 mm
Max tape power	30 W/m (9.1 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- 1.85" aperture
- Tape up to 47 mm wide
- Lateral corner available
- 25 ft continuous diffuser roll
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-TL185-SV-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-TL185	–	SV Anodized silver	–	OP Opal polycarbonate	–	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

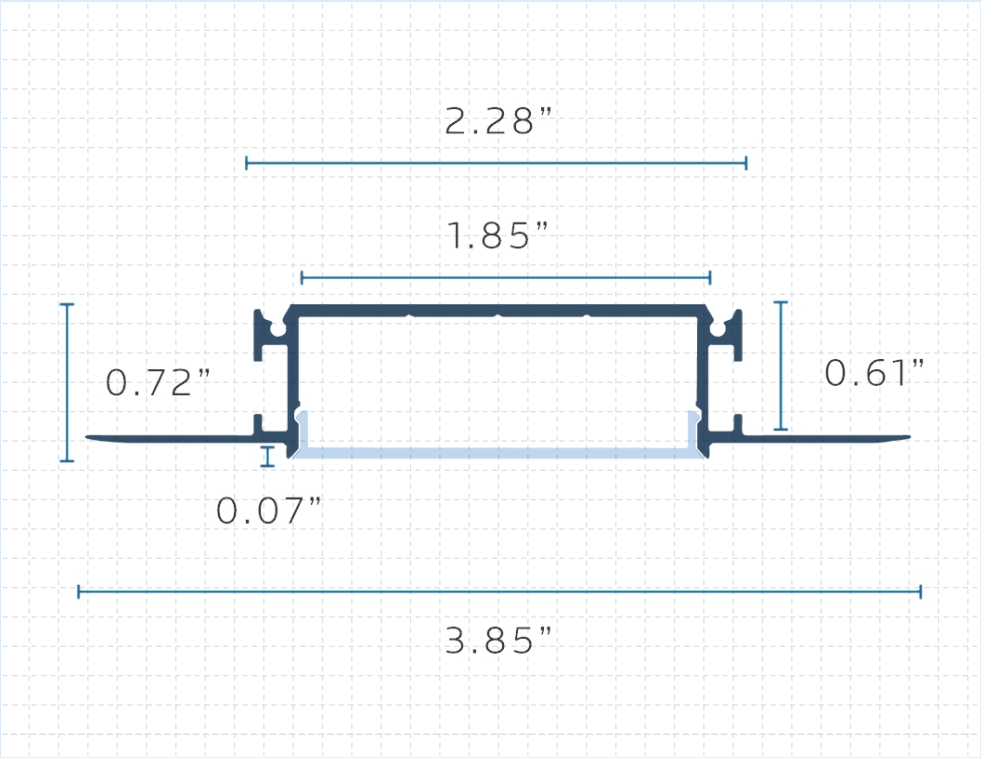

KEY DIMENSIONS

Aperture	1.85" (47.0 mm)
Overall width	3.85" (97.8 mm)
Length	96" (2438 mm)
Max tape width	47 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES



FL-TL185-LL
Lateral L-corner



FL-TL185-DF25
Opal diffuser roll, 25 ft

FL-TL185-CL
Mounting clip
Included with kit; spare

FL-TL185-EC
End cap
Included with kit; spare

FL-TL185-DF
Opal diffuser, 96" (spare)
Included with kit; spare