
Trimless Round-Edge 0.40 FL-TL40

A trimless mud-in channel in white, for a soft slot of light in walls and ceilings.

PRODUCT INFORMATION

Model	FL-TL40
Category	Trimless / Plaster-In
Aperture (inner width)	0.4" (10.2 mm)
Overall width	2.07" (52.6 mm)
Length	96" (8 ft) per piece
Max tape width	18 mm
Max tape power	10 W/m (3.0 W/ft)
Material	Extruded aluminum
Finish	Powder-coated white
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location

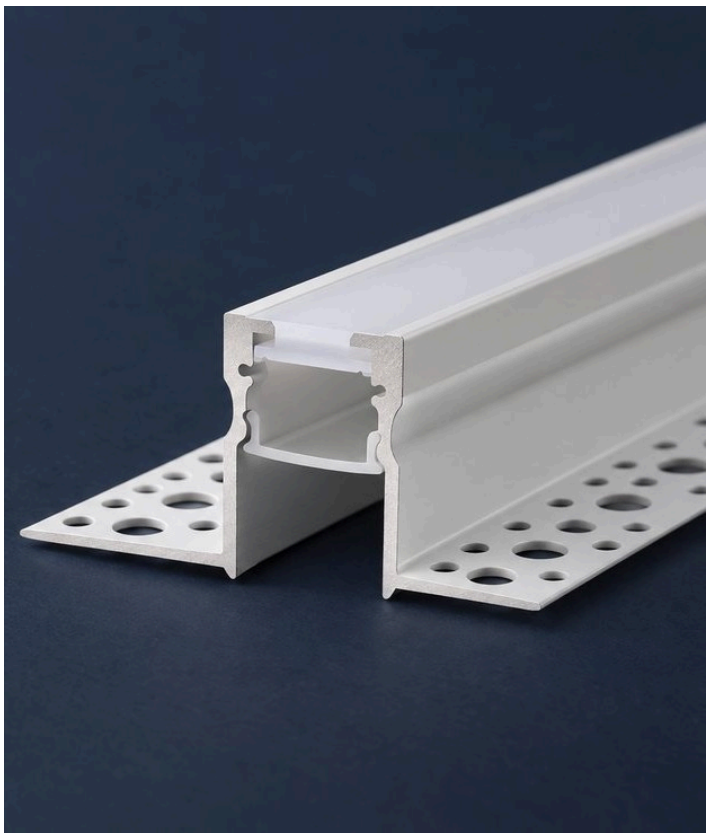

FEATURES

- 0.40" aperture, 2.07" flange
- Powder-coated white
- Up to 18 mm tape
- Low-power tape, up to 3 W/ft
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-TL40-WH-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-TL40	_	WH Powder-coated white	_	OP Opal polycarbonate	_	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

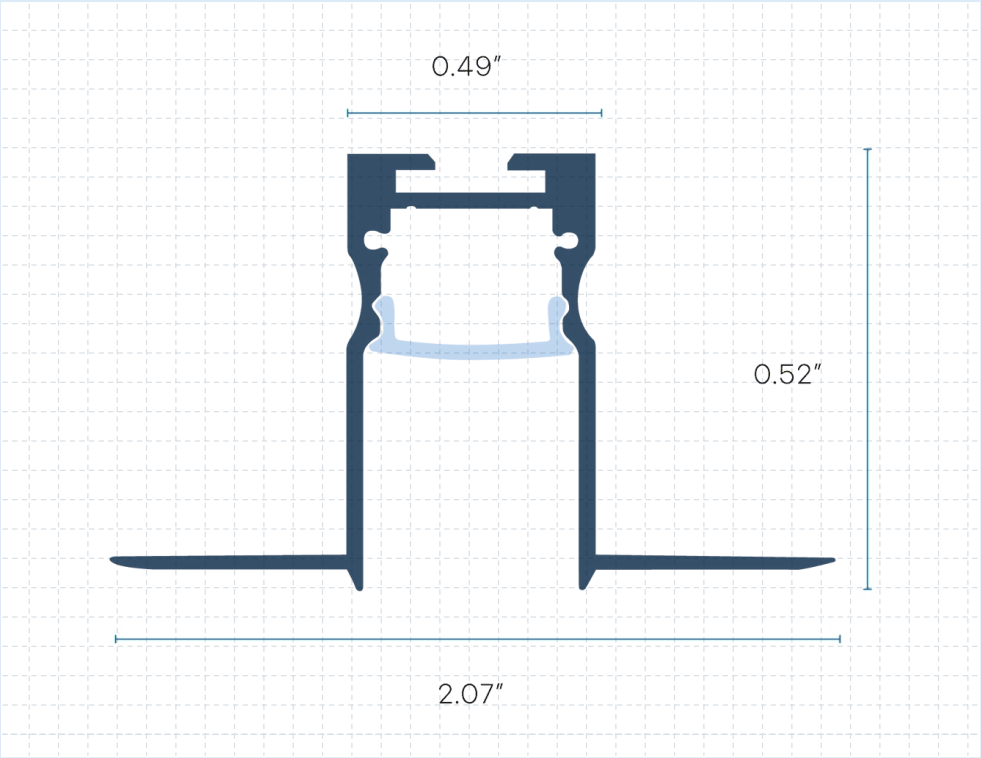

KEY DIMENSIONS

Aperture	0.4" (10.2 mm)
Overall width	2.07" (52.6 mm)
Length	96" (2438 mm)
Max tape width	18 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES

No separately sold accessories are listed for this profile; end caps and diffuser are included in each kit.