Plaster-In 0.55 FL-TL55

A slim plaster-in channel with a full set of corner and cross connectors for continuous ceiling and wall graphics.

PRODUCT INFORMATION

Model	FL-TL55
Category	Trimless / Plaster-In
Aperture (inner width)	0.55" (14.0 mm)
Overall width	2.51" (63.8 mm)
Length	96" (8 ft) per piece
Max tape width	14 mm
Max tape power	15 W/m (4.6 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- 0.55" aperture, 2.51" flange
- Lateral corner, X-connector and joiner available
- Up to 14 mm tape
- Opal diffuser
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-TL55-SV-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-TL55	–	SV Anodized silver	–	OP Opal polycarbonate	–	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

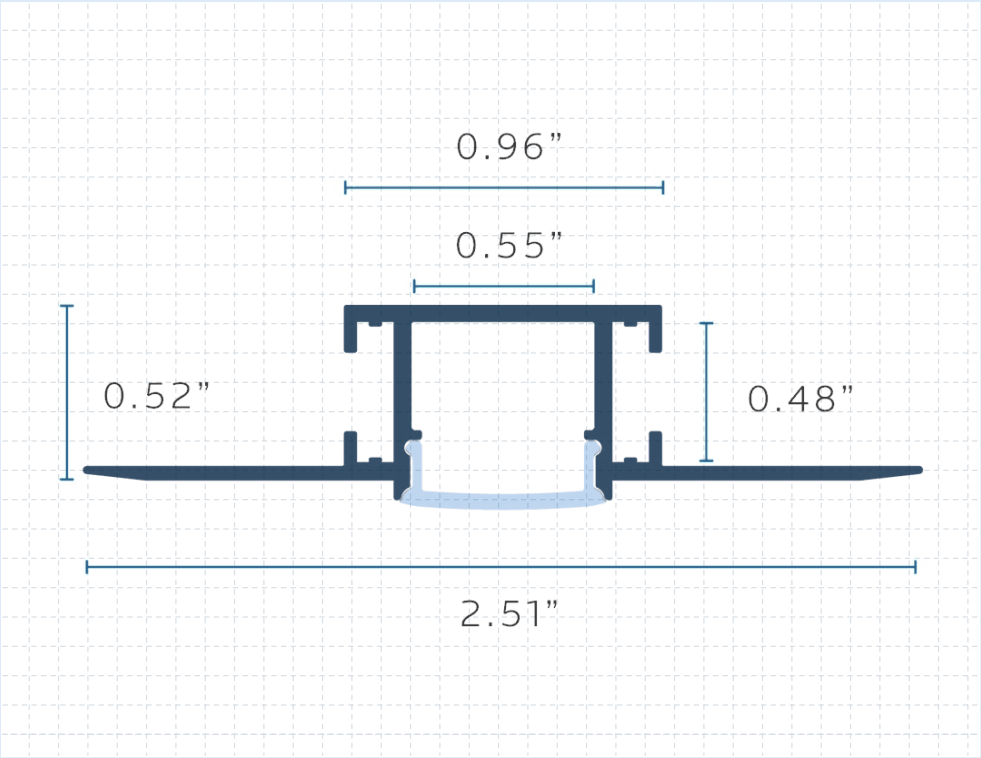

KEY DIMENSIONS

Aperture	0.55" (14.0 mm)
Overall width	2.51" (63.8 mm)
Length	96" (2438 mm)
Max tape width	14 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES



FL-TL55-J
Straight joiner



FL-TL55-LL
Lateral L-corner



FL-TL55-X
X-connector