Plaster-In 0.62 FL-TL62

A versatile plaster-in profile with every corner you need for continuous grids and pattern lighting.

PRODUCT INFORMATION

Model	FL-TL62
Category	Trimless / Plaster-In
Aperture (inner width)	0.62" (15.7 mm)
Overall width	2.87" (72.9 mm)
Length	96" (8 ft) per piece
Max tape width	15 mm
Max tape power	20 W/m (6.1 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- 0.62" aperture, 2.87" flange
- Lateral, inside and outside L, T and X connectors
- Up to 15 mm tape, 6.1 W/ft
- Opal diffuser
- Field-cuttable aluminum body and diffuser in 96" lengths

ORDERING GUIDE


MODEL NUMBER **FL-TL62-SV-OP-8**

MODEL	FINISH	DIFFUSER	LENGTH
FL-TL62	SV Anodized silver	OP Opal polycarbonate	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

Flowlite reserves the rights to change specifications without notice

DIMENSIONS

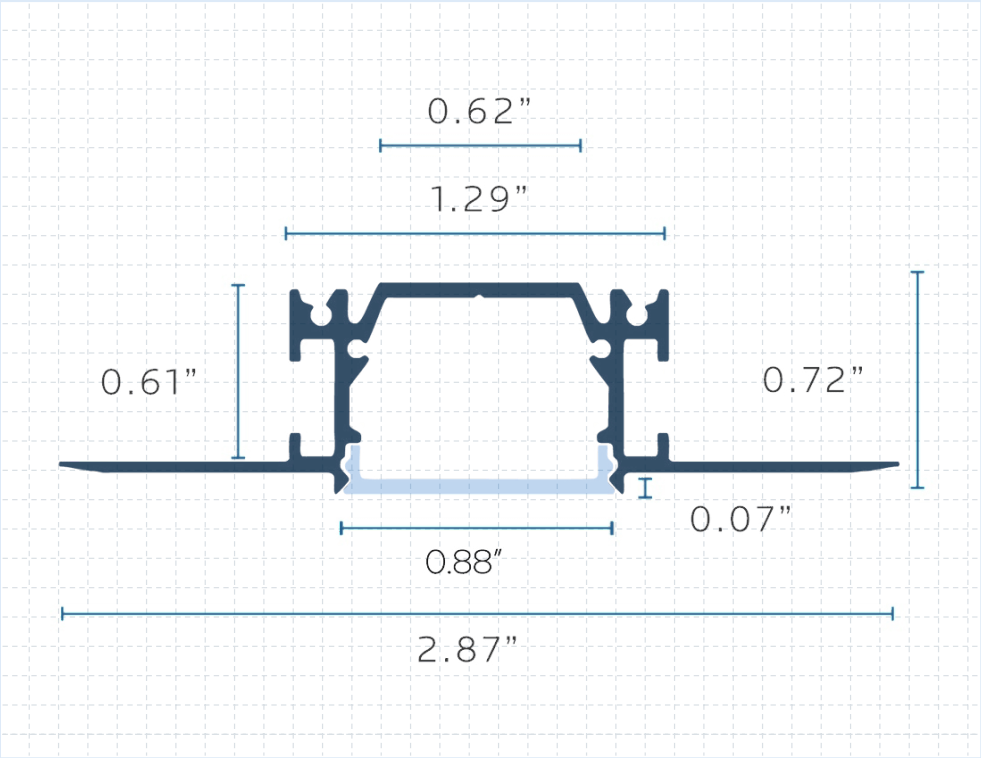

KEY DIMENSIONS

Aperture	0.62" (15.7 mm)
Overall width	2.87" (72.9 mm)
Length	96" (2438 mm)
Max tape width	15 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES




FL-TL62-J
Straight joiner




FL-TL62-LL
Lateral L-corner



FL-TL62-IL
Inside L-corner



FL-TL62-OL
Outside L-corner



FL-TL62-T
T-connector



FL-TL62-X
X-connector

FL-TL62-EC
End cap
Included with kit; spare

FL-TL62-DF
Opal diffuser, 96" (spare)
Included with kit; spare