FlowLite

Specification Sheet
Plaster-In 0.82 Channel

Plaster-In 0.82 FL-TL82

A medium plaster-in line with the full connector family, wide enough for high-output tape.

PRODUCT INFORMATION

Model	FL-TL82
Category	Trimless / Plaster-In
Aperture (inner width)	0.82" (20.8 mm)
Overall width	2.42" (61.5 mm)
Length	96" (8 ft) per piece
Max tape width	20 mm
Max tape power	20 W/m (6.1 W/ft)
Material	Extruded aluminum
Finish	Anodized silver
Diffuser	Opal (frosted) polycarbonate
End caps	PVC
Field cuttable	Yes
Location	Dry location



FEATURES

- 0.82" aperture
- Lateral, inside and outside L, T and X connectors
- Up to 20 mm tape, 6.1 W/ft
- 25 ft continuous diffuser roll available
- Field-cuttable aluminum body and diffuser in 96" lengths


ORDERING GUIDE

MODEL NUMBER **FL-TL82-SV-OP-8**

MODEL		FINISH		DIFFUSER		LENGTH
FL-TL82	–	SV Anodized silver	–	OP Opal polycarbonate	–	8 96" (8 ft)

Each kit includes: 1 x 96" profile, 1 x 96" opal diffuser, 2 x end caps

DIMENSIONS

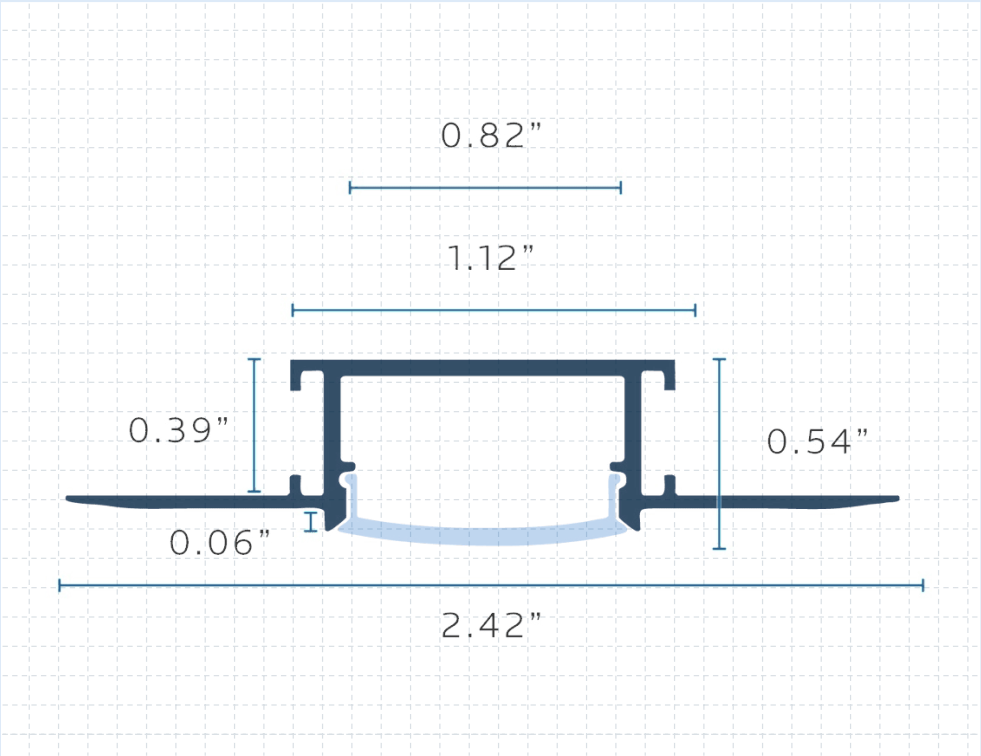

KEY DIMENSIONS

Aperture	0.82" (20.8 mm)
Overall width	2.42" (61.5 mm)
Length	96" (2438 mm)
Max tape width	20 mm

Dimensions in inches. Drawing not to scale. Allow for the tape lead and end caps when planning cut lengths.

ACCESSORIES



FL-TL82-J
Straight joiner



FL-TL82-LL
Lateral L-corner



FL-TL82-IL
Inside L-corner



FL-TL82-OL
Outside L-corner



FL-TL82-T
T-connector



FL-TL82-X
X-connector



FL-TL82-DF25
Opal diffuser roll, 25 ft

FL-TL82-EC
End cap
Included with kit; spare

FL-TL82-DF
Opal diffuser, 96" (spare)
Included with kit; spare